



KARTA PRODUKTOWA

TW4200 Parking Lift 3.5 t





TW4200 – four-post parking lift with 3500 kg lifting capacity, 1900 mm lifting height and manual safety-lock release.

Four-Post Parking Lift



KARTA PRODUKTOWA

TW4200 Parking Lift

3.5 t Four-Post Parking Lift for Workshops, Garages and Vehicle Storage

TW4200 is a four-post parking lift designed for workshops, private garages, showrooms, warehouses and locations where maximum use of parking space is important. The unit enables lifting vehicles weighing up to **3500 kg**.

The model features **manual safety-lock release**, four locking points, ramps with an anti-slip surface, drip trays and a transport-wheel kit that allows the lift to be relocated within the work area.

3.5 t Lifting Capacity, 1900 mm Lifting Height and Four-Point Safety Locks.

The TW4200 is suitable as a parking lift for saving space and as a practical service station.

Additional View

Additional Illustrative Image of the Lift

Below is an additional illustrative image of the equipment together with its accessories.




KARTA PRODUKTOWA




Lift View with Additional Equipment
Technical Images

Dimension Drawings and Technical Details of the TW4200 Lift

KARTA PRODUKTOWA

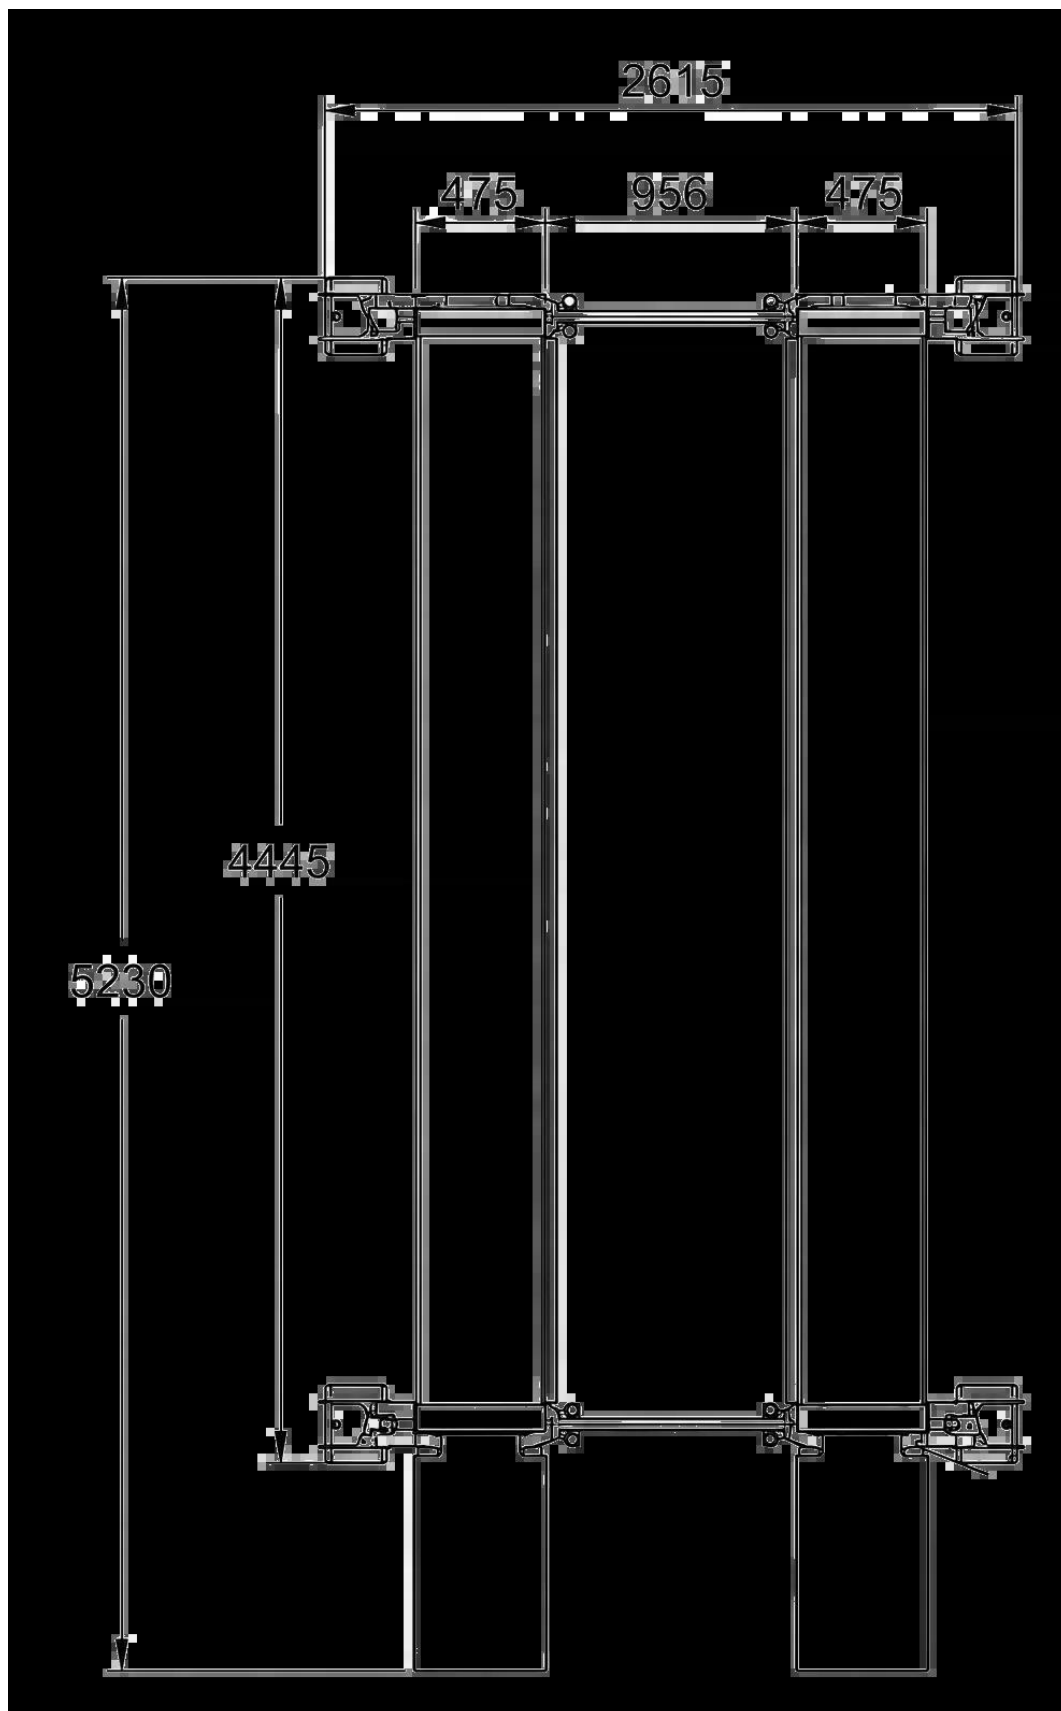

Parking Lift Dimensional Diagram

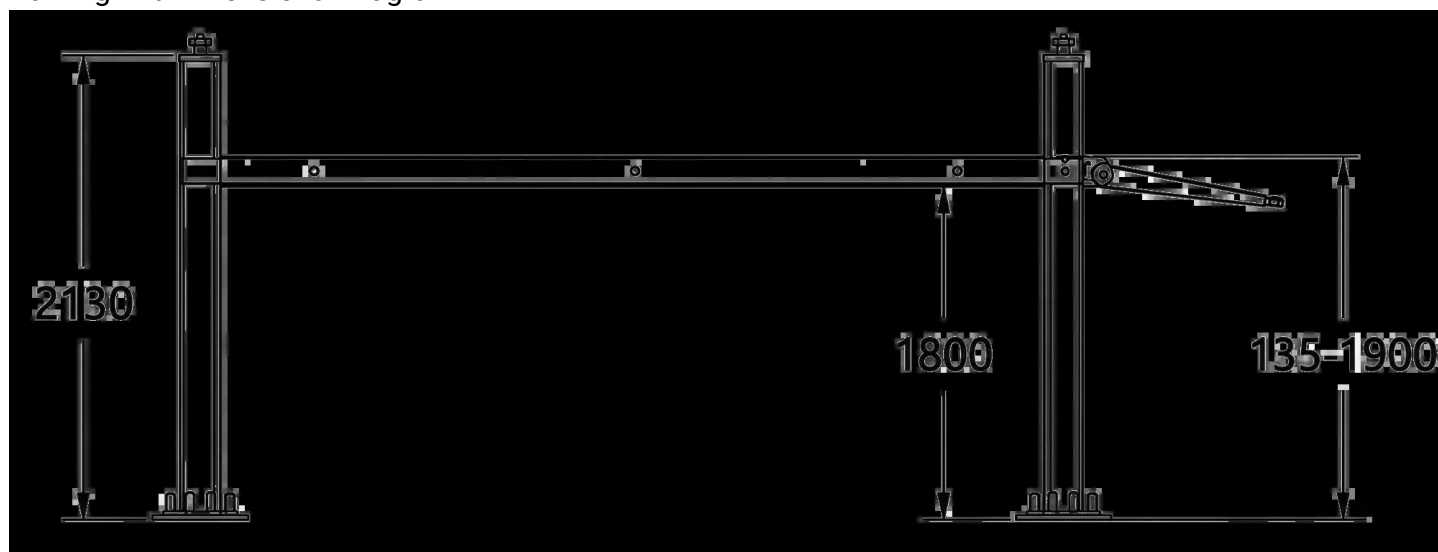

Platforms, Ramps and Four-Post System
Characteristics

Four-Post Parking Lift for Saving Space

The TW4200 has been designed as a parking lift for locations with limited space. Thanks to its four-post construction, the vehicle stands on drive-on platforms, while the space beneath it can be used to park a second car or carry out basic service work.

3500 kg lifting capacity – for passenger cars, SUVs and garage vehicles.

1900 mm lifting height – enables convenient use of the space beneath the vehicle.

Manual lock release – simple and durable operation of the safety mechanism.

Four-point safety locks – safety devices in all lift columns.

No special foundation required – installation does not require a complex setup.

Anti-slip ramps – facilitate safe vehicle drive-on to the platforms.

Drip trays – 4 plastic trays protect the vehicle below from dripping fluids.



KARTA PRODUKTOWA

Transport wheel kit — 4 polyurethane wheels make the lift easier to relocate.

Operating Process

How Does the TW4200 Lift Work?

1

Vehicle Drive-On

The vehicle drives onto the platforms via ramps with an anti-slip surface.

2

Lifting

The 2.2 kW motor raises the platforms to the required working or parking height.

3

Locking and Parking

Four-point locks secure the lift at the selected height.

Applications

Where Is the TW4200 Lift Suitable?

Private Garages

- Parking two vehicles.
- Space saving.
- Seasonal vehicle storage.

Workshops

- Basic vehicle service.
- Work-station organization.
- Additional working space.

Warehouses and Displays

- Vehicle storage.



KARTA PRODUKTOWA

- Showrooms and dealerships.
- Vehicle fleets.

Technical Specifications

Technical Parameters of the TW4200 Lift

Model **TW4200**

Equipment Type **Four-Post Parking Lift**

Lifting Capacity **3500 kg**

Motor Power **2,2 kW / 3,0 HP**

Lifting Height **1900 mm**

Minimum Height **135 mm**

Height Range **135–1900 mm**

Overall Length **5230 mm**

Platform Length **4445 mm**

Overall Width **2615 mm**

Platform Width **475 mm + 956 mm + 475 mm**

Column Height **2130 mm**

Power Supply **110 V / 220 V / 380 V**

Lock Release Type **Manual safety-lock release**

Safety Locks **Four-point automatic locks in all columns**

Ramps **Anti-Slip Surface**

Drip Trays **4 plastic drip trays**

Transport Kit **4 polyurethane wheels for relocating the lift**

Applications **Garage, workshop, parking, warehouse, vehicle display**